




## PL / M SERIES HIGH EFFICIENCY ENERGY CONSERVING EMERGENCY POWER PACK FOR COMPACT FLUORESCENT LAMPS

### Technical Data

Mode of Operation	: Maintained / Non-Maintained.
Input Voltage	: 240V $\pm$ 10%, 50Hz
Battery	: Hi-Temp. Nickel Cadmium / Sealed Lead Acid Battery.
Charging Current	: 200mA (Nominal).
Input Used	: 240V AC $\pm$ 10%-50Hz
Lamp Used	: Compact Fluorescent Tube (Tube Not Included).
Operating Temperature	: 0°C to 60°C
Charger	: Solid-State Electronics Provide High Reliability with Trickle Charge-Facility.
Indication	: Red L.E.D. "On" Indicates Charging. Equipped with Push Test-Switch to Simulate Power Failure.
Construction	: Electro-Galvanised Steel Casing of High Reflectance Finished with Corrosion Resistant Epoxy Spray Coating.
Weight	: $\pm$ 1.7kg
#Warranty	: 1 Year.
Compliance	: Malaysia Standards MS-619, IP-20.
Protection	: Low-Voltage Cut-Off to Prevent Over-Discharge of Battery.

Dimension in mm  
Tolerance:  $\pm$  0.03 mm  
**Recessed Mounting**

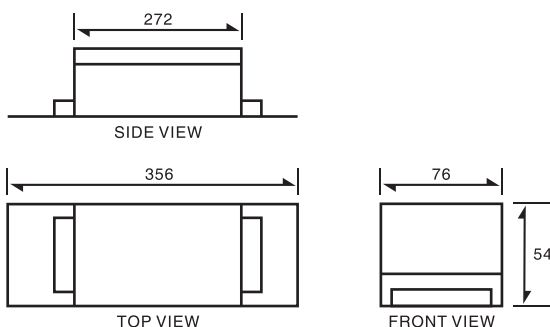

BACKUP TIME	<1	<2	<3
PL7 / PL9			✓
PL11 / PL13		✓	
PLC18 / 26	✓		

Please refer to manufacturer for any non-specified duration / duration might varies if different color tube used.