


HP 10 SERIES

HIGH EFFICIENCY ENERGY CONSERVING SELF-CONTAINED EMERGENCY HALOGEN POWER PACK

Technical Data

Mode of Operation	: Non-Maintained.
Input Voltage	: 240V \pm 10%, 50Hz
Battery	: 6V4AH or 12V4AH Sealed Lead Acid / Nickel Cadmium.
Charging Current	: 200mA (Nominal).
Lamp Used	: 6V-10W or 12V-20/50W Halogen Bulb.
Operating Temperature	: 0°C to 60°C
Charger	: Fully Automatic Constant Current. Solid-State Electronics Provide High Reliability with Trickle Charge-Facility.
Indication	: Red L.E.D. "On" Indicates Charging. Equipped with Push Test-Switch to Simulate Power Failure.
Backup Time	: 3 Hours Duration.
Construction	: Electro-Galvanised Steel Casing of High Reflectance Finished with Corrosion Resistant Epoxy Spray Coating.
#Warranty	: 5 Years.
Compliance	: Malaysia Standards MS-619, IP-20.
Protection	: Low-Voltage Cut-Off to Prevent Over-Discharge of Battery.

- ☆☆ HP models are specially designed to snap in and flush mounted onto ceiling panel.
- ☆☆ Advanced electronic circuit for reliability and efficiency.
- ☆☆ Distinctive and excellent for use in conjunction with decorative lighting environment.

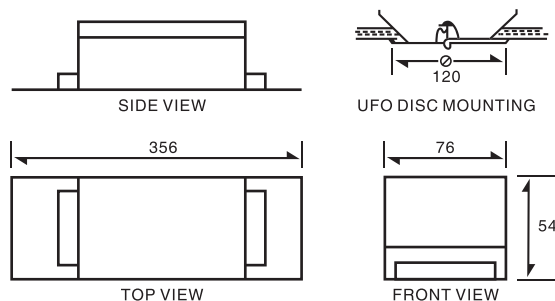

MODEL	HALOGEN BULB	BATTERY TYPE	DURATION	WEIGHT	UFO DISC
HP 10 SLA	6V 10W	Sealed Lead Acid	3 \pm 10%	\approx 1.9kg	with UFO DISC
HP 10NC	6V 10W	Nickel Cadmium	3 \pm 10%	\approx 1.65kg	with UFO DISC
HP 20SLA	12V 20W	Sealed Lead Acid	2 \pm 10%	\approx 2.85kg	without UFO DISC
HP 50SLA	12V 50W	Sealed Lead Acid	1 \pm 10%	\approx 2.85kg	without UFO DISC

☆☆ **REMARK: 120mm UFO Disc Holder and 10W Halogen Bulb included in HP 10**